

BUILDIPEDIA.COM

60 SIMPLE SECONDS


DONE BEFORE YOU KNOW IT

FIX YOUR LEAKY TOILET

DIFFICULTY



COST



Aww man, the toilet is leaking! Fortunately, fixing the leak is only a few flushes away.

Follow these steps to replace your wax ring, a common cause of freely flowing fixtues.

This project should take only a few minutes, and will cost less than \$5.

TOOLBOX



WRENCH




PLIERS



PUTTY KNIFE

STEPS

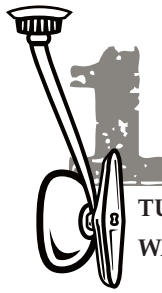

1
TURN OFF WATER SUPPLY



2
FLUSH THE TOILET




3
REMOVE REMAINING WATER WITH A CUP



4
DISCONNECT WATER SUPPLY FROM TANK




5
REMOVE NUTS AND LIFT TOILET OUT OF WORKSPACE



6
REMOVE OLD WAX RING AND ANY EXCESS WAX



PUTTY KNIFE

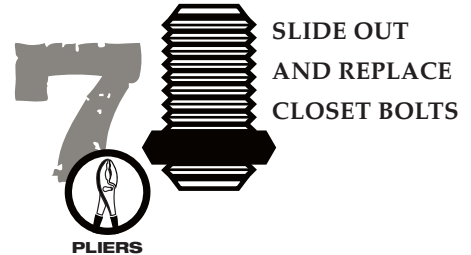

7
SLIDE OUT AND REPLACE CLOSET BOLTS



PLIERS



8
PLACE AND CENTER A NEW WAX RING.



9
RE-POSITION TOILET SECURE ALL NUTS



WRENCH



10
RECONNECT WATER SUPPLY
TURN ON WATER
CHECK FOR LEAKS

HOW TO VIDEO:

